



**The ATM Forum**  
**Technical Committee**

**Modification of Traffic Descriptor  
for an Active Connection  
Addendum to  
UNI 4.0/PNNI 1.0 /AINI**

**AF-CS-0148.000**

**July, 2000**

© 2000 The ATM Forum. This specification/document may be reproduced and distributed in whole, but (except as provided in the next sentence) not in part, for internal and informational use only and not for commercial distribution. Notwithstanding the foregoing sentence, any protocol implementation conformance statements (PICS) or implementation conformance statements (ICS) contained in this specification/document may be separately reproduced and distributed provided that it is reproduced and distributed in whole, but not in part, for uses other than commercial distribution. All other rights reserved. Except as expressly stated in this notice, no part of this specification/document may be reproduced or transmitted in any form or by any means, or stored in any information storage and retrieval system, without the prior written permission of The ATM Forum.

The information in this publication is believed to be accurate as of its publication date. Such information is subject to change without notice and The ATM Forum is not responsible for any errors. The ATM Forum does not assume any responsibility to update or correct any information in this publication. Notwithstanding anything to the contrary, neither The ATM Forum nor the publisher make any representation or warranty, expressed or implied, concerning the completeness, accuracy, or applicability of any information contained in this publication. No liability of any kind shall be assumed by The ATM Forum or the publisher as a result of reliance upon any information contained in this publication.

The receipt or any use of this document or its contents does not in any way create by implication or otherwise:

- Any express or implied license or right to or under any ATM Forum member company's patent, copyright, trademark or trade secret rights which are or may be associated with the ideas, techniques, concepts or expressions contained herein; nor
- Any warranty or representation that any ATM Forum member companies will announce any product(s) and/or service(s) related thereto, or if such announcements are made, that such announced product(s) and/or service(s) embody any or all of the ideas, technologies, or concepts contained herein; nor
- Any form of relationship between any ATM Forum member companies and the recipient or user of this document.

Implementation or use of specific ATM standards or recommendations and ATM Forum specifications will be voluntary, and no company shall agree or be obliged to implement them by virtue of participation in The ATM Forum.

The ATM Forum is a non-profit international organization accelerating industry cooperation on ATM technology. The ATM Forum does not, expressly or otherwise, endorse or promote any specific products or services.

NOTE: The user's attention is called to the possibility that implementation of the ATM interoperability specification contained herein may require use of an invention covered by patent rights held by ATM Forum Member companies or others. By publication of this ATM interoperability specification, no position is taken by The ATM Forum with respect to validity of any patent claims or of any patent rights related thereto or the ability to obtain the license to use such rights. ATM Forum Member companies agree to grant licenses under the relevant patents they own on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license. For additional information contact:

The ATM Forum  
Worldwide Headquarters  
2570 West El Camino Real, Suite 304  
Mountain View, CA 94040-1313  
Tel: +1-650-949-6700  
Fax: +1-650-949-6705

## Acknowledgments

The Control and Signalling working group was chaired by Gert Öster. *Mahmood R. Noorchashm* was the editor for the *Modification of Traffic Descriptor of an active connection addendum to the PNNI v1.0, the AINI and the UNI Signalling v4.0* specifications. The minutes at related working group meetings were recorded by Thomas Cornély. The following people made significant technical contributions to the *Modification of Traffic Descriptor of an active connection* specification:

Kathrin Aldinger  
Sirak Bahlbi  
Janey Cheu  
Thomas Cornély  
Robert Dianda  
Morteza Ghassemi  
Fred Kaudel  
Ghassem Koleyni  
Mahmood Noorchashm  
Gert Öster  
Javad Salahi  
Mickey Spiegel  
Malcolm Wiles

## Table of Contents

<b>1</b>	<b><i>Introduction</i></b> .....	<b>7</b>
<b>1.1</b>	<b>Scope</b> .....	<b>7</b>
<b>1.2</b>	<b>References</b> .....	<b>8</b>
<b>1.3</b>	<b>Acronyms</b> .....	<b>8</b>
<b>2</b>	<b><i>Coding requirements</i></b> .....	<b>10</b>
<b>2.1</b>	<b>Messages</b> .....	<b>10</b>
2.1.1	Coding Requirements at the UNI.....	10
2.1.2	Coding Requirements at the PNNI .....	12
2.1.3	Coding Requirements at the AINI.....	15
<b>2.2</b>	<b>Coding of specific message types and specific information elements</b> .....	<b>15</b>
2.2.1	Coding of specific message types and specific information elements at the UNI.....	15
2.2.2	Coding of specific message types and specific information elements at the PNNI.....	16
2.2.3	Coding of specific message types and specific information elements at the AINI .....	16
<b>3</b>	<b><i>Signalling Procedures</i></b> .....	<b>17</b>
<b>3.1</b>	<b>Modification Procedures for UNI</b> .....	<b>17</b>
3.1.1	Q.2963.1 Exceptions .....	17
3.1.2	Q.2963.2 Exceptions .....	17
3.1.3	Q.2963.3 Exceptions .....	17
<b>3.2</b>	<b>Modification Procedures for PNNI</b> .....	<b>17</b>
3.2.1	Q.2963.1 Exceptions .....	17
3.2.2	Q.2963.2 Exceptions .....	18
3.2.3	Q.2963.3 Exceptions .....	18
<b>3.3</b>	<b>Modification Procedures for AINI</b> .....	<b>18</b>
<b>4</b>	<b><i>Interactions with other capabilities</i></b> .....	<b>18</b>
<b>4.1</b>	<b>Interactions with other capabilities at the UNI</b> .....	<b>18</b>
4.1.1	Security Capability.....	18
4.1.2	Generic Identifier Transport .....	18
4.1.3	New States .....	18
<b>4.2</b>	<b>Interactions with other capabilities at the PNNI</b> .....	<b>18</b>
4.2.1	Security Capability.....	19
4.2.2	Generic Identifier.....	19
4.2.3	Generic Application Transport .....	19
4.2.4	Path and Connection Trace.....	19
4.2.5	New States .....	19
<b>4.3</b>	<b>Interactions with other capabilities for AINI</b> .....	<b>19</b>
<b>5</b>	<b><i>Protocol Interworking at the AINI</i></b> .....	<b>20</b>
<b>5.1</b>	<b>Interworking between AINI and B-ISUP</b> .....	<b>20</b>
5.1.1	Interworking specification for successful modification procedures (point-to-point calls) .....	20
5.1.2	Interworking specification for MODIFICATION REJECT procedures.....	24

<b>5.2</b>	<b>Interworking between AINI and PNNI.....</b>	<b>26</b>
<b><i>Annex A Protocol Implementation Conformance Statement (PICS) for UNI 4.0 Modification of an Active Connection .....</i></b>		
<b>A.1</b>	<b>Introduction.....</b>	<b>27</b>
A.1.1	Scope .....	27
A.1.2	Normative References .....	27
A.1.3	Definitions .....	27
A.1.4	Acronyms .....	27
A.1.5	Conformance .....	28
<b>A.2</b>	<b>Identification of the Implementation.....</b>	<b>28</b>
<b>A.3</b>	<b>PICS Proforma.....</b>	<b>30</b>
A.3.1	Global statement of conformance.....	30
A.3.2	Instructions for Completing the PICS Proforma.....	30
<b>A.4</b>	<b>Roles.....</b>	<b>31</b>
<b>A.5</b>	<b>Major Capabilities.....</b>	<b>31</b>
<b>A.6</b>	<b>Requesting Entity.....</b>	<b>31</b>
A.6.1	Messages Received .....	31
A.6.2	Messages Transmitted .....	32
A.6.3	Requesting entity Information Elements .....	32
<b>A.7</b>	<b>Responding entity.....</b>	<b>33</b>
<b>A.7.1</b>	<b>Messages received.....</b>	<b>33</b>
<b>A.7.2</b>	<b>Messages Transmitted.....</b>	<b>33</b>
<b>A.7.3</b>	<b>Responding entity Information Elements.....</b>	<b>34</b>
A.7.3.1	Responding entity Information Elements Received.....	34
A.7.3.2	Responding entity Information Elements Transmitted.....	34
<b>A.8</b>	<b>Timers .....</b>	<b>35</b>
<b>A.9</b>	<b>UNI Procedural PICS for modification.....</b>	<b>36</b>
<b><i>Annex B Protocol Implementation Conformance Statement (PICS) for PNNI 1.0 Modification of an Active Connection.....</i></b>		
<b>B.1</b>	<b>Introduction.....</b>	<b>39</b>
B.1.1	Scope.....	39
B.1.2	Normative References .....	39
B.1.3	Definitions .....	39
B.1.4	Acronyms .....	39
B.1.5	Conformance.....	40
<b>B.2</b>	<b>Identification of the Implementation.....</b>	<b>40</b>
<b>B.3</b>	<b>PICS Proforma.....</b>	<b>42</b>
B.3.1	Global statement of conformance.....	42
B.3.2	Instructions for Completing the PICS Proforma .....	42
<b>B.4</b>	<b>Roles.....</b>	<b>43</b>

<b>B.5 Major Capabilities .....</b>	<b>43</b>
<b>B.6 Transit Entity.....</b>	<b>43</b>
B.6.1 Messages Received.....	43
B.6.2 Messages Transmitted.....	44
B.6.3 Transit entity Information Elements.....	44
<b>B.7 Timers .....</b>	<b>48</b>
<b>B.8 PNNI Procedural PICS for modification.....</b>	<b>48</b>
<b><i>Annex C Protocol Implementation Conformance Statement (PICS) for AINI Modification</i></b>	
<b>C.1 Introduction.....</b>	<b>50</b>
C.1.1 Scope.....	50
C.1.2 Normative References .....	50
C.1.3 Definitions .....	50
C.1.4 Acronyms .....	50
C.1.5 Conformance.....	51
<b>C.2 Identification of the Implementation.....</b>	<b>51</b>
<b>C.3 PICS Proforma.....</b>	<b>53</b>
C.3.1 Global statement of conformance.....	53
C.3.2 Instructions for Completing the PICS Proforma .....	53
<b>C.4 Roles.....</b>	<b>54</b>
<b>C.5 Major Capabilities .....</b>	<b>54</b>
<b>C.6 Transit Entity.....</b>	<b>54</b>
C.6.1 Messages Received.....	54
C.6.2 Messages Transmitted.....	55
C.6.3 Transit entity Information Elements.....	55
<b>C.7 Timers .....</b>	<b>58</b>
<b>C.8 AINI Procedural PICS for modification .....</b>	<b>58</b>

# 1 Introduction

## [Informative]

This Addendum to ATM Forum UNI v4.0 “ATM User-Network Interface (UNI) Signalling Specification Version 4.0” [SIG 4.0], to ATM Forum PNNI v1.0 “Private Network-Network Interface Specification Version 1.0” [PNNI 1.0], to ATM Forum “PNNI v1.0 Errata and PICS” [PNNI 1.0 Errata], and to ATM Forum “ATM Inter-Network Interface (AINI) Specifications” [AINI], contains the description and specification of the Modification of Traffic Descriptor for an Active Connection for PNNI, AINI and UNI interfaces. This addendum is based on ITU-T Recommendations Q.2963.1 [Q.2963.1], Q.2963.2 [Q.2963.2], and Q.2963.3 [Q.2963.3].

Section one contains information about the scope of the Modification of Traffic Descriptor for an Active Connection, list of references and a table of acronyms. Section two specifies the Modification Procedures for UNI interfaces, section three specifies the Modification Procedures for PNNI interfaces, while section four specifies the Modification Procedures for AINI interfaces. Section five discusses the interactions with existing features, section six the compatibility with nodes that do not support this. Annex A contains the PICS Proforma for UNI, Annex B contains the PICS Proforma for PNNI and Annex C contains the PICS Proforma for AINI.

## 1.1 Scope

### [Normative]

The scope of this document is to specify signalling for the support of Modification of Traffic Descriptor of an Active Connection across private and public UNI interfaces, across PNNI interfaces, and across AINI interfaces. This is an optional feature of UNI v4.0, PNNI v1.0, and of AINI

The modify capability allows:

- the modification of the SCR, MBS, and PCR parameters
- the modification of those parameters which were included in the initial connection setup
- the parameters to be modified independently (e.g. can increase one and decrease another and can modify all or any subset of the original parameters)
- negotiation during modification via either the Alternative ATM traffic descriptor information element or the Minimum acceptable ATM traffic descriptor information element
- the modification of only point-to-point connections
- the modification of only UBR, VBR, and CBR connections
- multiple sequential modification requests
- only one outstanding modification request
- only the calling party to initiate modification (this avoids modification collisions)
- for the users to generate a confirmation message when the modification is complete

## 1.2 References

- [SIG 4.0] ATM Forum Technical Committee, *User-Network Interface (UNI) Signalling Specification*, Version 4.0, *af-sig-0061.000*, April 1996.
- [PNNI 1.0] ATM Forum Technical Committee, *Private Network-Network Interface Specification v1.0*, *af-pnni-0055.000*, March 1996
- [PNNI 1.0 Errata] ATM Forum Technical Committee, *Private Network-Network Interface v1.0 Errata and PICS*, ATM Forum *af-pnni-0081.000*, May 1997
- [AINI] ATM Forum Technical Committee, *ATM Inter-Network Interface (AINI) Specifications*, ATM Forum *af-cs-0125.000*, April 1999
- [Q.2963.1] ITU-T Recommendation Q.2963.1 (1999), *Digital Subscriber Signalling System No. 2 – Connection modification: Peak cell rate modification by the connection owner*.
- [Q.2963.2] ITU-T Recommendation Q.2963.2 (1997), *Digital Subscriber Signalling System No. 2 – Connection modification: Modification procedures for sustainable cell rate parameters*.
- [Q.2963.3] ITU-T Recommendation Q.2963.3 (1998), *Digital Subscriber Signalling System No. 2 – Connection modification: ATM traffic descriptor modification with negotiation by the connection owner*.
- [Q.2762]\* ITU-T Recommendation Q.2762 (1999), *Broadband Integrated Services Digital Network (B-ISDN) - General Functions of Messages and Signals of the B-ISDN User Part (B-ISUP) of Signalling System No. 7*
- [Q.2763]\* ITU-T Recommendation Q.2763 (1999), *Broadband Integrated Services Digital Network (B-ISDN) - Signalling System No. 7 B-ISDN User Part (B-ISUP) - Formats and Codes*
- [UNI SEC] ATM Forum Technical Committee, *UNI Signalling 4.0, Security Addendum*, *af-cs-0117.000*, May 1999
- [PNNII SEC] ATM Forum Technical Committee, *PNNI 1.0 Signalling Security Addendum, Version 1.0*, *af-cs-0116.000*, May 1999
- [PNNI GAT] ATM Forum Technical Committee, *PNNI Addendum for Generic Application Transport, Version 1.0*, *af-cs-0126.000*, July 1999
- [TRACE] ATM Forum Technical Committee, *PNNI Addendum for Path and Connection Trace Version 1.0*, *af-cs-0141.000*, March 2000
- [Q.2931 Amend4] Amendment 4 to Recommendation Q.2931 - User-network interface (UNI) layer 3 specification for basic call/connection control, 1999

## 1.3 Acronyms

AAL	ATM Adaptation Layer
ABR	Available Bit Rate
AINI	ATM Inter-Network Interface
ATM	Asynchronous Transfer Mode
B-ISUP	Broadband ISDN User Part
COA	CONNECTION AVAILABLE

---

\* These documents contain the ITU-T's updated B-ISUP signalling messages for the Modification of the Traffic Descriptor of Active Connections. These messages were previously covered in Q.2725.1, Q.2725.2, Q.2725.3, and Q.2725.4.



CBR	Constant Bit Rate
ITU-T	International Telecommunication Union-Telecommunication Standardization Sector
MBS	Maximum Burst Size
MCR	Minimum Cell Rate
MOA	MODIFICATION ACKNOWLEDGE Message
MOD	MODIFICATION REQUEST Message
MOR	MODIFICATION REJECT Message
nrtVBR	non-real time VBR
OA&M	Operations Administration & Maintenance
PCR	Peak Cell Rate
PICS	Protocol Implementation Conformance Statement
PNNI	Private Network-Network Interface
rtVBR	real time VBR
SCR	Sustainable Cell Rate
UBR	Unspecified Bit Rate
UNI	User Network Interface
VBR	Variable Bit Rate

## 2 Coding requirements

### [Normative]

#### 2.1 Messages

Modification capability uses the following new messages.

MODIFY REQUEST  
 MODIFY ACKNOWLEDGE  
 MODIFY REJECT  
 CONNECTION AVAILABLE

##### 2.1.1 Coding Requirements at the UNI

The coding of messages as specified in section 8.1 of ITU-T Recommendations Q.2963.1, Q.2963.2 and Q.2963.3 and as specified in section 3.1.11 of [Q.2931 Amend4] shall apply, with the following exceptions.

Replace all occurrences of connection owner by calling party.

##### 8.1.1/Q.2963.1 MODIFY REQUEST

In Table 8-1/Q.2963.1:

- Add the following:

Information Element name	Reference	Direction	Type	Length
Security Services	4/UNI SEC	both	O	12-512
Generic identifier transport	2.1.1/SIG 4.0	both	O	6-33

- the references for the ATM traffic descriptor is replaced by "Section 2 §4.5/Q.2931 of [SIG 4.0] and section 10.1.2.3 of [SIG 4.0]".

Note 2 of Table 8-1/Q.2963.1 is replaced by the following:

NOTE 2 – In this message octet groups 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, and 16 are optional but at least one of these octet groups shall be present.

##### 8.1.2/Q.2963.1 MODIFY ACKNOWLEDGE

Add the following to Table 8-2/Q.2963.1:

Information Element name	Reference	Direction	Type	Length
Security Services	4/UNI SEC	both	O	12-512
Generic identifier transport	2.1.1/SIG 4.0	both	O	6-33

**8.1.3/Q.2963.1 MODIFY REJECT**

Add the following to Table 8-3/Q.2963.1:

<b>Information Element name</b>	<b>Reference</b>	<b>Direction</b>	<b>Type</b>	<b>Length</b>
Security Services	4/UNI SEC	both	O	12-512
Generic identifier transport	2.1.1/SIG 4.0	both	O	6-33

**8.1.1/Q.2963.3 MODIFY REQUEST**

In Table 8-1/Q.2963.3, change the reference for the ATM traffic descriptor to section 2 §4.5/Q.2931 of [SIG 4.0] and section 10.1.2.3 of [SIG 4.0], and change the reference for the Alternative ATM traffic descriptor from 8.2.1/Q.2962 to 8.1.2.1/SIG 4.0 and change the reference for the Minimum acceptable ATM traffic descriptor from 8.2.2/Q.2962 to "8.1.2.2/SIG 4.0". The following restriction applies: The Alternative ATM traffic descriptor information element may not be present for UBR calls.

**The coding of the CONNECTION AVAILABLE message as specified 3.1.11 of [Q.2931 Amend4] shall apply with the following exceptions:**

Add the following to Table 3-24/Q.2931:

<b>Information Element name</b>	<b>Reference</b>	<b>Direction</b>	<b>Type</b>	<b>Length</b>
Security Services	4/UNI SEC	both	O	12-512
Generic identifier transport	2.1.1/SIG 4.0	both	O	6-33

## 2.1.2 Coding Requirements at the PNNI

### 2.1.2.1 MODIFY REQUEST

This message is sent by Preceding side to Succeeding side to initiate connection modification. See Table 2-1.

**TABLE 2-1** MODIFY REQUEST message content

Message type: MODIFY REQUEST Significance: Global Direction: Both				
Information element	Reference	Direction	Type	Length
Protocol discriminator	6.4.2/PNNI 1.0	Both	M	1
Call reference	6.4.3/PNNI 1.0	Both	M	4
Message type	6.4.4.1/PNNI 1.0	Both	M	2
Message length	6.4.4.2/PNNI 1.0	Both	M	2
ATM traffic descriptor	6.4.5.9/PNNI 1.0	Both	M (1)	8 - 28
Notification indicator	6.4.5.27/PNNI 1.0	Both	O (2)	5 -*
Alternative ATM traffic descriptor	2.2.1.1	Both	O (3,6)	8-28
Minimum acceptable ATM traffic descriptor	2.2.1.3	Both	O (3)	8-28
Security services	4/PNNI SEC	Both	O	12-512
Generic identifier transport	6.4.5.31/PNNI 1.0	Both	O(2,4)	7-33
Generic application transport	3.1/PNNI GAT	Both	O (5)	6-512
<b>NOTES</b> 1. In this message octet groups 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, and 16 are optional but at least one of these octet groups shall be present. 2. Included if the received modify indication contains this information. 3. Either the Alternative ATM traffic descriptor information element or the Minimum acceptable ATM traffic descriptor information element, but not both, shall be included in the MODIFY REQUEST message when traffic parameters are negotiable. 4. This information element may be present up to 3 times. 5. This information element may be present up to 5 times. 6. This information element may not be present for UBR calls.				

**2.1.2.2 MODIFY ACKNOWLEDGE**

This message is sent by Succeeding side to Preceding side to indicate the modify request is accepted. See Table 2-2.

TABLE 2-2 **MODIFY ACKNOWLEDGE message content**

Message type: MODIFY ACKNOWLEDGE				
Significance: Global				
Direction: Both				
Information element	Reference	Direction	Type	Length
Protocol discriminator	6.4.2/PNNI 1.0	Both	M	1
Call reference	6.4.3/PNNI 1.0	Both	M	4
Message type	6.4.4.1/PNNI 1.0	Both	M	2
Message length	6.4.4./2PNNI 1.0	Both	M	2
ATM traffic descriptor	6.4.5.9/PNNI 1.0	Both	O (1)	8 - 28
Notification indicator	6.4.5.27/PNNI 1.0	Both	O (2)	5 -*
Broadband report type	2.2.1.2	Both	O (2,3)	5
Security services	4/PNNI SEC	Both	O	12-512
Generic identifier transport	6.4.5.31/PNNI 1.0	Both	O(2,4)	7-33
Generic application transport	3.1/PNNI GAT	Both	O (5)	6-512
NOTES				
<ol style="list-style-type: none"> <li>1. Included to specify the traffic parameter values allocated for the modification if one or more traffic parameters were negotiable in the MODIFY REQUEST message.</li> <li>2. Included if the received modify acknowledge indication contains this information.</li> <li>3. Included when the addressed user requires confirmation of the success of modification in the addressed user to calling user direction.</li> <li>4. This information element may be present up to 3 times.</li> <li>5. This information element may be present up to 5 times.</li> </ol>				

**2.1.2.3 MODIFY REJECT**

This message is sent by Succeeding side to Preceding side to indicate the modify request is rejected. See Table 2-3.

**TABLE 2-3** MODIFY REJECT message content

Message type: MODIFY REJECT				
Significance: Global				
Direction: Both				
Information element	Reference	Direction	Type	Length
Protocol discriminator	6.4.2/PNNI 1.0	Both	M	1
Call reference	6.4.3/PNNI 1.0	Both	M	4
Message type	6.4.4.1/PNNI 1.0	Both	M	2
Message length	6.4.4./2PNNI 1.0	Both	M	2
Notification indicator	6.4.5.27/PNNI 1.0	Both	O (1)	5 -*
Cause	6.4.5.27/PNNI 1.0	Both	M	6-34
Security services	4/PNNI SEC	Both	O	12-512
Generic identifier transport	6.4.5.31/PNNI 1.0	Both	O(1,2)	7-33
Generic application transport	3.1/PNNI GAT	Both	O (3)	6-512
NOTES				
1. Included if the received modify indication contains this information.				
2. This information element may be present up to 3 times				
3. This information element may be present up to 5 times				

**2.1.2.4 CONNECTION AVAILABLE**

This message is sent by Preceding side to Succeeding side when sent by the modification requesting user. See Table 2-4.

**TABLE 2-4** CONNECTION AVAILABLE message content

Message type: CONNECTION AVAILABLE				
Significance: Global				
Direction: Both				
Information element	Reference	Direction	Type	Length
Protocol discriminator	6.4.2/PNNI 1.0	Both	M	1
Call reference	6.4.3/PNNI 1.0	Both	M	4
Message type	6.4.4.1/PNNI 1.0	Both	M	2
Message length	6.4.4./2PNNI 1.0	Both	M	2
Notification indicator	6.4.5.27/PNNI 1.0	Both	O (1)	5 -*
Security services	4/PNNI SEC	Both	O	12-512
Broadband report type	2.2.1.2	Both	O (1)	5

Generic identifier transport	6.4.5.31/PNNI 1.0	Both	O(1,2)	7-33
Generic application transport	3.1/PNNI GAT	Both	O (3)	6-512
NOTES				
<ol style="list-style-type: none"> <li>1. Included if the received modify indication contains this information.</li> <li>2. This information element may be present up to 3 times.</li> <li>3. This information element may be present up to 5 times.</li> </ol>				

### 2.1.3 Coding Requirements at the AINI

Section 2.1.2 of this document applies to AINI.

## 2.2 Coding of specific message types and specific information elements

### 2.2.1 Coding of specific message types and specific information elements at the UNI

The coding of information elements as specified in sections 7.2 and 8.2 of ITU-T Recommendations Q.2963.1, Q.2963.2, and Q.2963.3 and as specified in section 4.5.25 of [Q.2931 Amend4] shall apply with the following exceptions.

#### 2.2.1.1 *Alternative ATM traffic descriptor*

The modifications to the Alternative traffic descriptor information element specified in 8.2.2.2/Q.2963.3 shall apply with the following exception:

In the first paragraph replace 8.2.1/Q.2962 by 8.1.2.1/SIG 4.0.

#### 2.2.1.2 *Broadband report type*

The coding of the Broadband report type information element as specified in section 4.5.25 of [Q.2931 Amend4] shall apply with the following exceptions:

In table 4-23/Q.2931, only codepoint "00000010" is applicable.

#### 2.2.1.3 *Minimum Acceptable ATM traffic descriptor*

The modifications to the Minimum Acceptable ATM traffic descriptor information element specified in 8.2.2.3/Q.2963.3 shall apply with the following exception:

In the first paragraph replace 8.2.2/Q.2962 by 8.1.2.2/SIG 4.0.

#### 2.2.1.4 *Message Type*

The modifications to the Message type information element specified in 8.2.1/Q.2963.1 shall apply with the following addition:

The coding of the message type information element for the CONNECTION AVAILABLE messages is specified in Table 4-2/Q.2931 of [Q.2931 Amend4].

## 2.2.2 Coding of specific message types and specific information elements at the PNNI

### 2.2.2.1 Call State

The following call state code points are added: to octet 5 in section 6.4.5.14/PNNI 1.0.  
PNNI call state value (octet 5) (Note)

<i>Bits</i>						<i>Meaning</i>
6	5	4	3	2	1	
0	0	1	1	0	1	NN13 - Modify requested
0	0	1	1	1	0	NN14 - Modify received

### 2.2.2.2 Alternative ATM traffic descriptor

See section 2.2.1.1.

### 2.2.2.3 Broadband report type

See section 2.2.1.2.

### 2.2.2.4 Minimum Acceptable ATM traffic descriptor

See section 2.2.1.3.

### 2.2.2.5 Message Type

Section 6.4.4.1/PNNI 1.0 applies with the following additions:

The modifications to the Message type information element specified in 8.2.1/Q.2963.1 shall apply, and

The coding of the message type information element for the CONNECTION AVAILABLE messages in Table 4-2/Q.2931 of [Q.2931 Amend4] shall apply.

## 2.2.3 Coding of specific message types and specific information elements at the AINI

Section 2.2.2 of this document applies to AINI.



### 3 Signalling Procedures

#### [Normative]

#### 3.1 Modification Procedures for UNI

When modifying the parameters in the Traffic Descriptor of a point-to-point call at the UNI, the ITU-T Recommendations Q.2963.1, Q.2963.2 and Q.2963.3 shall apply, with the exceptions stated in this section.

The modification capability is not applicable to ABR connections. The modification capability is applicable to CBR, real time VBR, non-real time VBR, and UBR connections.

##### 3.1.1 Q.2963.1 Exceptions

Note: the revisions to [Q.2963.1] specified in [Q.2963.2] and [Q.2963.3] apply.

##### 3.1.2 Q.2963.2 Exceptions

Note: the revisions to [Q.2963.2] specified in [Q.2963.3] apply.

Replace all occurrences of connection owner by calling party.

##### 5.2/Q.2963.2 Modification of a point-to-point connection

Delete the last paragraph (Note: The paragraph is not applicable since the OAM traffic descriptor information element is not supported in [SIG 4.0]).

##### 3.1.3 Q.2963.3 Exceptions

Replace all occurrences of connection owner by calling party.

#### 3.2 Modification Procedures for PNNI

When modifying the bandwidth parameters of a point-to-point call, the transit entity procedures in ITU-T Recommendations Q.2963.1, Q.2963.2 and Q.2963.3 shall apply, with the exceptions stated in this section.

The modification capability is not applicable to ABR connections. The modification capability is applicable to CBR, real time VBR, non-real time VBR, and UBR connections.

##### 3.2.1 Q.2963.1 Exceptions

Note: the revisions to [Q.2963.1] specified in [Q.2963.2] and [Q.2963.3] apply.

Only Sections 9 and 13.1 of [Q.2963.1] apply with the following revisions:

1. Replace all occurrences of U/N13 with NN13.
2. Replace all occurrences of U/N14 with NN14.
3. In 9.2.2/Q2963.1, replace "start Timer T334" with "optionally start Timer T334".
4. Insert the following at the beginning of section 9.3/Q.2963.1:  
If the optional Timer T334 is not supported then while in the active state, a CONNECTION AVAILABLE message shall be transported transparently.

Otherwise, if Timer T334 is supported then the following applies:

### **3.2.2 Q.2963.2 Exceptions**

Note: the revisions to [Q.2963.2] specified in [Q.2963.3] apply.

Only Sections 5 and 9 of [Q.2963.2] apply with the following revisions:

Replace all occurrences of connection owner by calling party.

#### **5.2/Q.2963.2 Modification of a point-to-point connection**

Delete the last paragraph (Note: The paragraph is not applicable since the OAM traffic descriptor information element is not supported in [PNNI 1.0]).

### **3.2.3 Q.2963.3 Exceptions**

Only Sections 5 and 9 of [Q.2963.3] apply with the following revisions.

Replace all occurrences of connection owner by calling party.

## **3.3 Modification Procedures for AINI**

Section 3.2 of this document applies to AINI.

## **4 Interactions with other capabilities**

[Normative]

### **4.1 Interactions with other capabilities at the UNI**

#### **4.1.1 Security Capability**

The Security Services information element is added to all the new messages to allow security procedures during connection modification.

#### **4.1.2 Generic Identifier Transport**

The Generic identifier information element is added to all the new messages since these may be end-to-end messages.

#### **4.1.3 New States**

As a general rule, existing procedures that apply for the active state shall apply for the Modify requested and Modify received state and a call would be maintained while in one of these states when an AAL connection reset or AAL connection release occurred (see 5.6.9/Q.2931 and 5.6.10/Q.2931)).

In the Modify requested state or in the Modify received:

- Whenever a STATUS message is sent the Call state shall be the current state.
- The procedures in section 2 §5.6.9/Q.2931 and §5.6.10/Q.2931 of [SIG 4.0] for the active state shall apply for calls in the modify requested or modify received states.

### **4.2 Interactions with other capabilities at the PNNI**

#### **4.2.1 Security Capability**

The Security Services information is added to all the new messages to allow security procedures during connection modification.

#### **4.2.2 Generic Identifier**

The Generic identifier information element is added to all the new messages since these may be end-to-end messages.

#### **4.2.3 Generic Application Transport**

The Generic application transport information element is added to all the new messages.

#### **4.2.4 Path and Connection Trace**

In section 5.3/[TRACE], it is stated that a TRACE CONNECTION message may be rejected when the call is not in the Active state. This condition shall be modified such that the TRACE CONNECTION message is not rejected when the call is in the Active, Modify Requested, or Modify Received state.

#### **4.2.5 New States**

As a general rule the existing procedures that apply for the active state shall apply for the Modify requested and Modify received state (e.g. a connection trace would not be rejected because the call was in one of these 2 states (see 5.3/[TRACE]) and a call would be maintained while in one of these states when an AAL connection reset or AAL connection release occurred (see 5.6.9/Q.2931 and 5.6.10/Q.2931)).

In the Modify requested state or in the and Modify received:

- Whenever a STATUS message is sent the Call state shall be the current state.
- The procedures in 6.5.6.9/PNNI 1.0 and 6.5.6.10/PNNI 1.0 for the active state shall apply for calls in the modify requested or modify received states.
- See section 4.2.4 for interactions with Connection Trace.

### **4.3 Interactions with other capabilities for AINI**

Interactions as specified for PNNI apply at the AINI except for the Path and Connection Trace.

## 5 Protocol Interworking at the AINI

Three configurations are considered

1. PNNI -> AINI -> B-ISUP
2. B-ISUP -> AINI -> PNNI
3. PNNI -> AINI -> PNNI

### 5.1 Interworking between AINI and B-ISUP

#### 5.1.1 Interworking specification for successful modification procedures (point-to-point calls)

##### 5.1.1.1 Arrow diagrams

###### 5.1.1.1.1 AINI to B-ISUP

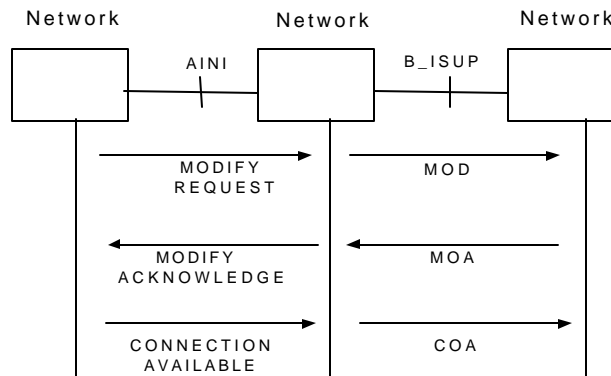


Figure 1. Example of Successful Modification with Negotiation (AINI -> B-ISUP)

5.1.1.1.2 B-ISUP to AINI

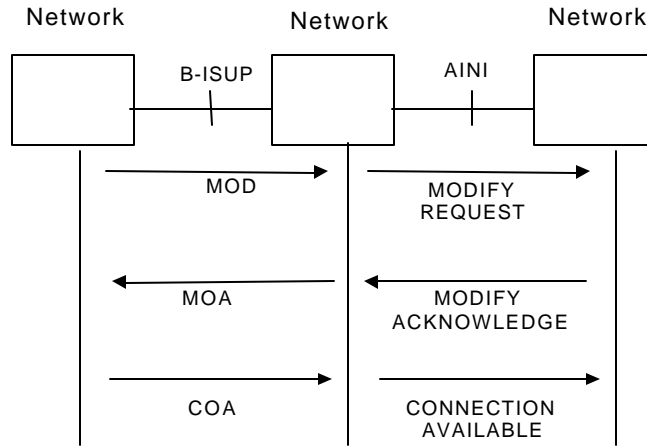


Figure 2. Example of successful Modification (B-ISUP ->AINI)

5.1.1.2 Mapping of the AINI MODIFY REQUEST Message and the B-ISUP Modify Request (MOD)

5.1.1.2.1 AINI to B-ISUP

AINI	to	B-ISUP
MODIFY REQUEST		MOD
Message Type		Message Type
Message length		Message length
ATM traffic descriptor		ATM cell rate and/or Additional ATM cell rate (Note 1)
Notification indicator		Notification
Alternative ATM traffic descriptor		Alternative ATM cell rate
Minimum Acceptable ATM Traffic Descriptor		Minimum ATM cell rate
Security services		Not carried
Generic identifier transport		Not carried
Generic application transport		Not carried

NOTES:

1. The PCR parameters (if present) are mapped to/from the ATM cell rate and the SCR or MBS parameters (if present) are mapped to/from the Additional ATM cell rate.

**5.1.1.2.2 B-ISUP to AINI**

<b>B-ISUP</b>	<b>to</b>	<b>AINI</b>
<b>MOD</b>		<b>MODIFY REQUEST</b>
Message Type		Message Type
Message length		Message length
Message compatibility information		Not carried
ATM cell rate and/or Additional ATM cell rate (Note 1)		ATM traffic descriptor
Notification		Notification indicator
Alternative ATM traffic descriptor		Alternative ATM traffic descriptor
Minimum ATM cell rate		Minimum ATM traffic descriptor

## NOTES:

1. The PCR parameters (if present) are mapped to/from the ATM cell rate and the SCR or MBS parameters (if present) are mapped to/from the Additional ATM cell rate.

**5.1.1.3 Mapping of the AINI MODIFY ACKNOWLEDGE with the B-ISUP Modify Acknowledge (MOA)****5.1.1.3.1 AINI to B-ISUP**

<b>AINI</b>	<b>to</b>	<b>B-ISUP</b>
<b>MODIFY ACKNOWLEDGE</b>		<b>MOA</b>
Message Type		Message Type
Message length		Message length
ATM traffic descriptor		ATM cell rate and/or Additional ATM cell rate (Note 1)
Notification indicator		Notification
Broadband Report type		Report type
Security services		Not carried
Generic identifier transport		Not carried
Generic application transport		Not carried

## NOTES:

1. The PCR parameters (if present) are mapped to/from the ATM cell rate and the SCR or MBS parameters (if present) are mapped to/from the Additional ATM cell rate.

**5.1.1.3.2 B-ISUP to AINI**

<b>B-ISUP</b>	<b>to</b>	<b>AINI</b>
<b>MOA</b>		<b>MODIFY ACKNOWLEDGE</b>
Message Type		Message Type
Message length		Message length
Message compatibility information		Not carried
ATM cell rate and/or Additional ATM cell rate (Note 1)		ATM traffic descriptor
Notification		Notification indicator
Report type		Broadband Report type

## NOTES:

1. The PCR parameters (if present) are mapped to/from the ATM cell rate and the SCR or MBS parameters (if present) are mapped to/from the Additional ATM cell rate.

**5.1.1.4 Mapping of the AINI CONNECTION AVAILABLE Message with the B-ISUP Connection Available Message (COA)****5.1.1.4.1 AINI to B-ISUP**

<b>AINI</b>	<b>to</b>	<b>B-ISUP</b>
<b>CONNECTION AVAILABLE</b>		<b>COA</b>
Message Type		Message Type
Message length		Message length
Notification indicator		Notification
Broadband Report type		Report type
Security services		Not carried
Generic identifier transport		Not carried
Generic application transport		Not carried

5.1.1.4.2 B-ISUP to AINI

B-ISUP COA	to	AINI CONNECTION AVAILABLE
Message Type		Message Type
Message length		Message length
Message compatibility information		Not carried
Notification		Notification indicator
Report type		Broadband Report type

5.1.2 Interworking specification for MODIFICATION REJECT procedures

5.1.2.1 Arrow diagrams

5.1.2.1.1 AINI to B-ISUP

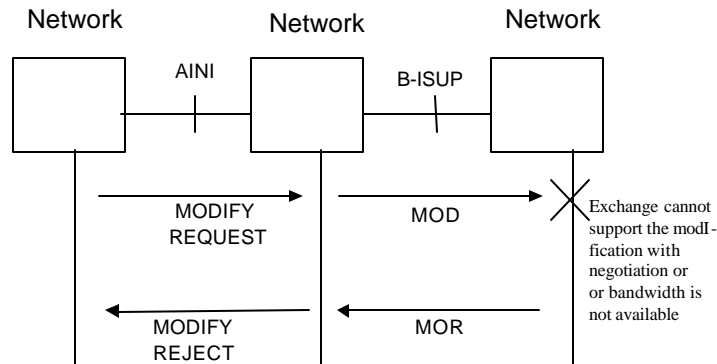


Figure 3. Example of unsuccessful Modification with negotiation (AINI ->B-ISUP)



5.1.2.1.2 B-ISUP to AINI

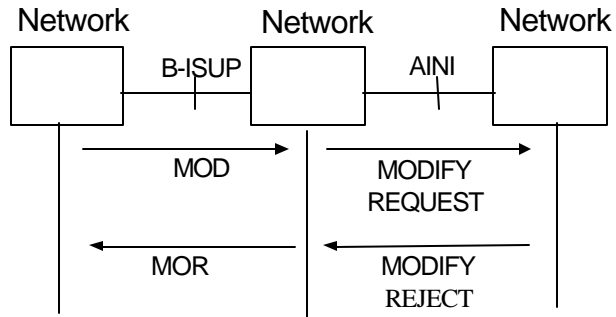


Figure 4. Unsuccessful modification (B-ISUP -> AINI)

5.1.2.2 Mapping of the AINI MODIFY REJECT Message with the B-ISUP Modify Reject (MOR)

5.1.2.2.1 AINI to B-ISUP

AINI	to	B-ISUP
MODIFY REJECT		MOR
Message Type		Message Type
Message length		Message length
Notification indicator		Notification
Cause		Cause Indicators
Security services		Not carried
Generic identifier transport		Not carried
Generic application transport		Not carried

**5.1.2.2.2 B-ISUP to AINI**

<b>B-ISUP</b>	<b>to</b>	<b>AINI</b>
<b>MOR</b>		<b>MODIFY REJECT</b>
Message Type		Message Type
Message length		Message length
Message compatibility information		Not carried
Cause Indicators		Cause
Notification		Notification indicator

**5.2 Interworking between AINI and PNNI**

All PNNI 1.0 messages are mapped to their equivalent counterparts in AINI messages, and all AINI messages are mapped to their equivalent counterparts in PNNI 1.0.

## Annex A Protocol Implementation Conformance Statement (PICS) for UNI 4.0 Modification of an Active Connection

### A.1 Introduction

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented. Such a statement is called a Protocol Implementation Conformance Statement (PICS). For further details on PICS see the Implementation Conformance Statement Proforma Style Guide [A.7].

#### A.1.1 Scope

This document provides the PICS proforma for the Addendum to UNI 4.0 for the support of Modification of an Active Connection, as specified in this document, in compliance with the relevant requirements, and in accordance with the relevant guidelines, given in ISO/IEC 9646-7 [A.2]. In most cases, statements contained in notes in the specification, which were intended as information, are not included in the PICS.

#### A.1.2 Normative References

- [A.1] ISO/IEC 9646-1: 1994, Information technology – Open systems interconnection – Conformance testing methodology and framework – Part 1: General Concepts (See also ITU Recommendation X.290 (1995)).
- [A.2] ISO/IEC 9646-7: “Information technology – Open systems interconnection – Conformance testing methodology and framework – Part 7: Implementation Conformance Statements”.
- [A.3] ATM User-Network Interface (UNI) Signalling Specification, Version 4.0, af-sig-0061.000, July 1996.
- [A.4] ITU-T Recommendation Q.2963.1 (1999), *Digital Subscriber Signalling System No. 2 – Connection modification: Peak cell rate modification by the connection owner.*
- [A.5] ITU-T Recommendation Q.2963.2 (1997), *Digital Subscriber Signalling System No. 2 – Connection modification: Modification procedures for sustainable cell rate parameters.*
- [A.6] ITU-T Recommendation Q.2963.3 (1998), *Digital Subscriber Signalling System No. 2 – Connection modification: : ATM traffic descriptor modification with negotiation by the connection owner.*
- [A.7] ATM Forum Technical Committee, "Implementation Conformance Statement Proforma Style Guide", af-test-0137-000, February 2000.

#### A.1.3 Definitions

This document uses the following terms defined in ISO/IEC 9646-1 [A.1]:

- A Protocol Implementation Conformance Statement (PICS) is a statement made by the supplier of an implementation or system, stating which capabilities have been implemented for a given protocol.
- A PICS proforma is a document, in the form of a questionnaire, designed by the protocol specifier or conformance test suite specifier, which when completed for an implementation or system becomes the PICS.

#### A.1.4 Acronyms

AAL	ATM Adaptation Layer
ABR	Available Bit Rate

AINI	ATM Inter-Network Interface
ATM	Asynchronous Transfer Mode
B-ISUP	Broadband ISDN User Part
COA	CONNECTION AVAILABLE
CBR	Constant Bit Rate
ITU-T	International Telecommunication Union-Telecommunication Standardization Sector
IUT	Implementation Under Test
M	Mandatory requirements (these are to be observed in all cases)
MBS	Maximum Burst Size
MCR	Minimum Cell Rate
MOA	MODIFICATION ACKNOWLEDGE Message
MOD	MODIFICATION REQUEST Message
MOR	MODIFICATION REJECT Message
nrtVBR	non-real time VBR
N/A	Not supported, not applicable, or the conditions for status are not met.
O	Optional (may be selected to suit the implementation, provided that any requirements applicable to the options are observed)
O.n	Optional, but support is required for either at least one or only one of the options in the group labeled with the same numeral "n".
OA&M	Operations Administration & Maintenance
PCR	Peak Cell Rate
PICS	Protocol Implementation Conformance Statement
PNNI	Private Network-Network Interface
rtVBR	real time VBR
SCR	Sustainable Cell Rate
SUT	System Under Test
UBR	Unspecified Bit Rate
UNI	User Network Interface
VBR	Variable Bit Rate

### A.1.5 Conformance

The supplier of a protocol implementation which is claimed to conform to the ATM Forum UNI signalling Addendum for the support of Modification is required to complete a copy of the PICS proforma provided in this document and is required to provide the information necessary to identify both the supplier and the implementation.

## A.2 Identification of the Implementation

### Date of the Statement

\_\_\_\_\_

### Implementation Under Test (IUT) Identification

**IUT Name:** \_\_\_\_\_

**IUT Version:** \_\_\_\_\_

\_\_\_\_\_

**System Under Test (SUT) Identification**

**SUT Name:** \_\_\_\_\_

**Hardware Configuration:** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Operating System:** \_\_\_\_\_

**Product supplier**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

\_\_\_\_\_

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

**Client (if different from product supplier)**

**Name:** \_\_\_\_\_

**Address:**

\_\_\_\_\_

\_\_\_\_\_

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

**PICS Contact Person**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

-----  
**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

-----

-----

### Identification of the protocol

This PICS proforma applies to the following standard:

af-cs-0148.000, Modification of Traffic Descriptor for an Active Connection, Addendum to ATM Forum UNI v4.0 "ATM User-Network Interface (UNI) Signalling Specification Version 4.0", to ATM Forum PNNI v1.0 "Private Network-Network Interface Specification Version 1.0", to ATM Forum "PNNI v1.0 Errata and PICS", and to ATM Forum "ATM Inter-Network Interface (AINI) Signalling Specification"

## A.3 PICS Proforma

### A.3.1 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No) \_\_\_\_\_

Note: Answering "No" indicates non-conformance to the protocol specification. Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the implementation is non-conforming, on pages attached to the PICS proforma.

### A.3.2 Instructions for Completing the PICS Proforma

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided. In particular, an explicit answer shall be entered, in each of the support column entries provided, using the specified notation.

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO-IEC 9646-7 [A.2], are used for the support column:

Y or y supported by the implementation.

N or n not supported by the implementation.

N/A, n/a or -no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional status).

The following notations, defined in ISO/IEC 9646-7 [A.2] are used for the status column:

- M mandatory - the capability is required to be supported.
- O optional - the capability may be supported or not.
- N/A not applicable - in the given context, it is impossible to use the capability.
- X prohibited (excluded) - there is a requirement not to use this capability in the given context.
- O*i* qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which identifies a unique group of related optional items and the logic of their selection which is defined immediately following the table.

#### A.4 Roles

Item	Major role: Does the implementation support...	Conditions for status	Status	Reference	Support
R 1.1	the user role?		O.1		<input type="checkbox"/> Yes <input type="checkbox"/> No
R 1.2	the network role?		O.1		<input type="checkbox"/> Yes <input type="checkbox"/> No
R 2.1	the requirements for the modification requesting entity?	R1.1 R1.2	O.2 M	3.7/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 2.2	requirements for the responding entity?	R1.1 R1.2	O.2 M	3.8/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 3.1	requirements for the transit entity?		O.3	3.6/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 3.2	requirements for the terminating entity?		O.3	3.5/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
O.1	support of at least one of these options is required				
O.2	support of at least one of these options is required				
O.3	support of at least one of these options is required				
Comments:					

#### A.5 Major Capabilities

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
MC 1.1	Modification of the PCR?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 1.2	Modification of the SCR?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 1.3	Modification of the MBS?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 2	Confirmation of modification	NOT (R3.1 and R2.2)	M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
		R3.1 and R2.2	O		<input type="checkbox"/> Yes <input type="checkbox"/> No
MC3	Negotiation, using alternative ATM Traffic Descriptor	SIG 4.0 Sec 8	O	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC4	Negotiation, using Minimum acceptable ATM Traffic Descriptor	SIG 4.0 Sec 8	O	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments: Modification includes increase and decrease					

#### A.6 Requesting Entity

##### A.6.1 Messages Received

Item	Does the IUT support ...	Condition	Status	Reference	Support
------	--------------------------	-----------	--------	-----------	---------

		for status			
MR 1	MODIFY ACKNOWLEDGE?		M	2.1	Yes__No__
MR 2	MODIFY REJECT?		M	2.1	Yes__No__
Comments:					

### A.6.2 Messages Transmitted

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
MT 1	MODIFY REQUEST?		M	2.1	Yes__No__
MT 2	CONNECTION AVAILABLE		M	2.1	Yes__No__
Comments:					

### A.6.3 Requesting entity Information Elements

The tables in this subsection ask questions related to the support of information elements in messages received and transmitted by the IUT.

#### A.6.3.1 *Requesting entity Information Elements Received*

##### A.6.3.1.1 Modify Acknowledge Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 2.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.5	ATM traffic descriptor?	MC3 OR MC4	M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.6	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.7	Broadband report type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.8	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.9	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

##### A.6.3.1.2 Modify Reject Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 3.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.6	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.7	Cause?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.8	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.9	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					



**A.6.3.2 Requesting entity Information Elements Transmitted**

Indicating support for an item in the tables in this subsection, states that the implementation has the ability to generate, and to transmit in the specified message, the information elements listed. Such support does not necessarily mean that the indicated information element is included in every instance of the transmitted message.

**A.6.3.2.1 Modify Request Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 1.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.5	ATM traffic descriptor?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.6	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.7	Alternative ATM traffic descriptor?	MC3	M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.8	Minimum acceptable ATM traffic descriptor?	MC4	M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.9	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.10	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**A.6.3.2.2 Connection Available Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 4.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.5	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.6	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.7	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**A.7 Responding entity**

The tables provided in this section need only to be completed for responding entity implementations, where item R2.2 in Section A.4 table is supported.

**A.7.1 Messages received**

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
MR 1	MODIFY REQUEST?		M	2.1	Yes__No__
MR 2	CONNECTION AVAILABLE	R3.1 R3.2	M O	2.1	Yes__No__
Comments:					

**A.7.2 Messages Transmitted**

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
------	--------------------------	----------------------	--------	-----------	---------

MT 1	MODIFY REJECT?		M	2.1	Yes__No__
MT 2	MODIFY ACKNOWLEDGE?		M	2.1	Yes__No__
Comments:					

### A.7.3 Responding entity Information Elements

The tables in this subsection ask questions related to the support of information elements in messages received and transmitted by the IUT.

#### A.7.3.1 Responding entity Information Elements Received

##### A.7.3.1.1 Modify Request Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 1.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.5	ATM traffic descriptor?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.6	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.7	Alternative ATM traffic descriptor?	MC3	M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.8	Minimum acceptable ATM traffic descriptor?	MC4	M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.9	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.10	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

##### A.7.3.1.2 Connection Available Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 4.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.5	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.6	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.7	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

#### A.7.3.2 Responding entity Information Elements Transmitted

Indicating support for an item in the tables in this subsection, states that the implementation has the ability to generate, and to transmit in the specified message, the information elements listed. Such support does not necessarily mean that the indicated information element is included in every instance of the transmitted message.

**A.7.3.2.1 Modify Acknowledge Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 2.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.5	ATM traffic descriptor?	MC3 OR MC4	M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.6	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.7	Broadband report type?	R3.1 R3.2	M O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.8	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.9	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**A.7.3.2.2 Modify Reject Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 3.1	Protocol discriminator?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.2	Call reference?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.3	Message type?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.4	Message length?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.5	Notification indicator?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.6	Cause?		M	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.7	Security services?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.8	Generic identifier transport?		O	2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**A.8 Timers**

Indicating support for an item in table below states that the implementation has a timer that operates in accordance with the description in section 13.1 of Q.2963.1 as an initiating entity, in section 13.2 of Q.2963.1 as a responding entity, or in section 13.3/Q.2963.1 as a transit entity, as appropriate.

Item	Timer: Does the implementation support ...	Conditions for status	Status	Reference	Support
TM 1	T360?	R2.1	M	13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
TM 2	T361?	MC2 AND R2.2 AND R3.2	M	13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A
TM 3	T334?	R2.2 AND R3.1	M	13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A
Comments:					

**A.9 UNI Procedural PICS for modification**

Item	Does the IUT ...	Condition for status	Status	Reference	Support
PROC 1	Follow the procedures of 9.1.1/Q.2963.1 as modified by 9/Q.2963.2 to request the modification of a call without negotiation?	R2.1	M	9.1.1/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 2	Follow the procedures of 9.1.1/Q.2963.3 to request the modification of a call with negotiation?	R2.1 and (MC3 or MC4)	M	9.1.1/Q.2963.3	Yes__No__
PROC 3	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the modify requested state follow the procedures of 9.1.2/Q.2963.1?	R2.1	M	9.1.2/Q.2963.1	Yes__No__
PROC 4	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM traffic descriptor information element while in the modify requested state follow the procedures of 9.1.2/Q.2963.3?	R2.1 and (MC3 or MC4)	M	9.1.2/Q.2963.3	Yes__No__
PROC 5	On receipt of a MODIFY REJECT message while in the modify requested state follow the procedures of 9.1.3/Q.2963.1?	R2.1	M	9.1.3/Q.2963.1	Yes__No__
PROC 6	On receipt of a STATUS message, which indicates the active state and cause No. 97 or cause No. 101, while in the modify requested state follow the procedures of 9.1.4/Q.2963.1?	R2.1	M	9.1.4/Q.2963.1	Yes__No__
PROC 7	On expiry of Timer T360 clear the call with cause No. 102?	R2.1	M	9.1.5/Q.2963.1	Yes__No__
PROC 8	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.1/Q.2963.1 as modified by 9/Q.2963.2?	R2.2	M	9.2.1/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 9	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.1/Q.2963.3?	R2.2 and (MC3 or MC4)	M	9.2.1/Q.2963.3	Yes__No__
PROC 10	On receipt of an indication that the modification without negotiation has been accepted while in the modify requested state follow the procedures of 9.2.2/Q.2963.1 as modified by 9/Q.2963.2?	R2.2 and R3.1	M	9.2.2/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 11	On receipt of an indication that the modification with negotiation has been accepted while in the modify requested state follow the procedures of 9.2.2/Q.2963.3?	R2.2 and R3.1 and (MC3 or MC4)	M	9.2.2/Q.2963.3	Yes__No__

PROC 12	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.2/Q.2963.1 as modified by 9/Q.2963.2?	R2.2 and R3.2	M	9.2.2/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 13	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.2/Q.2963.3?	R2.2 and R3.2 and (MC3 or MC4)	M	9.2.2/Q.2963.3	Yes__No__
PROC 14	On receipt of a CONNECTION AVAILABLE message while Timer T361 is active follow the procedures of 9.2.3/Q.2963.1?	R3.2	M	9.2.3/Q.2963.1	Yes__No__
PROC 15	On expiry of Timer T361 follow the procedures of 9.2.3/Q.2963.1?	R3.2	M	9.2.3/Q.2963.1	Yes__No__
PROC 16	On receipt of an indication that the modification has been rejected while in the modify requested state, follow the procedures of 9.2.4/Q.2963.1?	R2.2 and R3.1	M	9.2.4/Q.2963.1	Yes__No__
PROC 17	On receipt of a MODIFY REJECT message while in the active state follow the procedures of 9.2.2/Q.2963.1?	R2.2 and R3.2	M	9.2.4/Q.2963.1	Yes__No__
PROC 18	On receipt of a MODIFY REQUEST message with both the Minimum acceptable ATM traffic descriptor and the Alternative ATM traffic descriptor information, reject the modification following the procedures in 9.2.4/Q.2963.3?	R2.2 and (MC3 or MC4)	M	9.2.4/Q.2963.3	Yes__No__
PROC 19	On receipt of a MODIFY REQUEST message with an Alternative ATM traffic descriptor information element which is not coded according to the allowed coding, treat the Alternative ATM traffic descriptor information element as a non-mandatory information element with content error?	R2.2 and MC3	M	9.2.4/Q.2963.3	Yes__No__
PROC 20	On receipt of a MODIFY REQUEST message with Minimum Acceptable ATM traffic descriptor information element which is not coded according to the allowed coding, treat the Minimum Acceptable ATM traffic descriptor information element as a non-mandatory information elements with content error?	R2.2 and MC4	M	9.2.4/Q.2963.3	Yes__No__
PROC 21	On receipt of a MODIFY REQUEST message with ATM traffic parameters which are not according to the allowed combinations while in the active state follow the procedures of 9.2.5/Q.2963.1?	R2.2	M	9.2.5/Q.2963.1	Yes__No__
PROC 22	On receipt of a CONNECTION AVAILABLE message while in the active state, follow the procedures of 9.3/Q.2963.1?	R3.1	M	9.3/Q.2963.1	Yes__No__

Comments:

## Annex B Protocol Implementation Conformance Statement (PICS) for PNNI 1.0 Modification of an Active Connection

### B.1 Introduction

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented. Such a statement is called a Protocol Implementation Conformance Statement (PICS). For further details on PICS see the Implementation Conformance Statement Proforma Style Guide [B.6].

#### B.1.1 Scope

This document provides the PICS proforma for the Addendum to AINI/PNNI 1.0 for the support of Modification of an Active Connection, as specified in this document in compliance with the relevant requirements, and in accordance with the relevant guidelines, given in ISO/IEC 9646-7 [B.2]. In most cases, statements contained in notes in the specification, which were intended as information, are not included in the PICS.

#### B.1.2 Normative References

- [B.1] ISO/IEC 9646-1: 1994, Information technology – Open systems interconnection – Conformance testing methodology and framework – Part 1: General Concepts (See also ITU Recommendation X.290 (1995)).
- [B.2] ISO/IEC 9646-7:1994, Information technology – Open systems interconnection – Conformance testing methodology and framework – Part 7: Implementation Conformance Statements”.
- [B.3] ITU-T Recommendation Q.2963.1 (1999), *Digital Subscriber Signalling System No. 2 – Connection modification: Peak cell rate modification by the connection owner.*
- [B.4] ITU-T Recommendation Q.2963.2 (1997), *Digital Subscriber Signalling System No. 2 – Connection modification: Modification procedures for sustainable cell rate parameters.*
- [B.5] ITU-T Recommendation Q.2963.3 (1998), *Digital Subscriber Signalling System No. 2 – Connection modification: : ATM traffic descriptor modification with negotiation by the connection owner.*
- [B.6] ATM Forum Technical Committee, "Implementation Conformance Statement Proforma Style Guide", af-test-0137-000, February 2000.

#### B.1.3 Definitions

This document uses the following terms defined in ISO/IEC 9646-1 [B.1]:

- A Protocol Implementation Conformance Statement (PICS) is a statement made by the supplier of an implementation or system, stating which capabilities have been implemented for a given protocol.
- A PICS proforma is a document, in the form of a questionnaire, designed by the protocol specifier or conformance test suite specifier, which when completed for an implementation or system becomes the PICS.

#### B.1.4 Acronyms

AAL	ATM Adaptation Layer
ABR	Available Bit Rate

AINI	ATM Inter-Network Interface
ATM	Asynchronous Transfer Mode
B-ISUP	Broadband ISDN User Part
COA	CONNECTION AVAILABLE
CBR	Constant Bit Rate
ITU-T	International Telecommunication Union-Telecommunication Standardization Sector
IUT	Implementation Under Test
M	Mandatory requirements (these are to be observed in all cases)
MBS	Maximum Burst Size
MCR	Minimum Cell Rate
MOA	MODIFICATION ACKNOWLEDGE Message
MOD	MODIFICATION REQUEST Message
MOR	MODIFICATION REJECT Message
nrtVBR	non-real time VBR
N/A	Not supported, not applicable, or the conditions for status are not met.
O	Optional (may be selected to suit the implementation, provided that any requirements applicable to the options are observed)
O.n	Optional, but support is required for either at least one or only one of the options in the group labeled with the same numeral "n".
OA&M	Operations Administration & Maintenance
PCR	Peak Cell Rate
PICS	Protocol Implementation Conformance Statement
PNNI	Private Network-Network Interface
rtVBR	real time VBR
SCR	Sustainable Cell Rate
SUT	System Under Test
UBR	Unspecified Bit Rate
UNI	User Network Interface
VBR	Variable Bit Rate

### B.1.5 Conformance

The supplier of a protocol implementation which is claimed to conform to the ATM Forum PNNI specification for Modification of an Active Connection is required to complete a copy of the PICS proforma provided in this document and is required to provide the information necessary to identify both the supplier and the implementation.

## B.2 Identification of the Implementation

### Date of the Statement

-----

### Implementation Under Test (IUT) Identification

IUT Name: -----

IUT Version: -----

-----

### System Under Test (SUT) Identification

SUT Name: -----



**Hardware Configuration:** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Operating System:** \_\_\_\_\_

**Product Supplier**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

\_\_\_\_\_

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

**Client (if different from product supplier)**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

\_\_\_\_\_

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

**PICS Contact Person**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_

\_\_\_\_\_

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

## Identification of the protocol

This PICS proforma applies to the following:

af-cs-0148.000, Modification of Traffic Descriptor for an Active Connection, Addendum to ATM Forum UNI v4.0 "ATM User-Network Interface (UNI) Signalling Specification Version 4.0", to ATM Forum PNNI v1.0 "Private Network-Network Interface Specification Version 1.0", to ATM Forum "PNNI v1.0 Errata and PICS", and to ATM Forum "ATM Inter-Network Interface (AINI) Signalling Specification"

## B.3 PICS Proforma

### B.3.1 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No) \_\_\_\_\_

Note: Answering "No" indicates non-conformance to the protocol specification. Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the implementation is non-conforming, on pages attached to the PICS proforma.

### B.3.2 Instructions for Completing the PICS Proforma

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided. In particular, an explicit answer shall be entered, in each of the support column entries provided, using the specified notation.

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO-IEC 9646-7 [B.2], are used for the support column:

Y or y supported by the implementation.

N or n not supported by the implementation.

N/A, n/a or -no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional status).

The following notations, defined in ISO/IEC 9646-7 [B.2], are used for the status column:

M	mandatory - the capability is required to be supported.
O	optional - the capability may be supported or not.
N/A	not applicable - in the given context, it is impossible to use the capability.
X	prohibited (excluded) - there is a requirement not to use this capability in the given context.
O.i	qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which identifies a unique group of related optional items and the logic of their selection which is defined immediately following the table.

## B.4 Roles

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
R 1	requirements for the transit entity?		M	3.6/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 2.1	requirements for the modification requesting entity?		M	3.7/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 2.2	requirements for the responding entity?		M	3.8/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

## B.5 Major Capabilities

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
MC 1.1	Modification of the PCR?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 1.2	Modification of the SCR?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 1.3	Modification of the MBS?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 2	Negotiation, using Alternative ATM Traffic Descriptor		O	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 3	Negotiation, using Minimum Acceptable ATM Traffic Descriptor		O	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments: Modification includes increase and decrease					

## B.6 Transit Entity

### B.6.1 Messages Received

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
MR 1	MODIFY REQUEST?		M	2.1.2.1	Yes__No__
MR 2	MODIFY ACKNOWLEDGE?		M	2.1.2.2	Yes__No__
MR 3	MODIFY REJECT?		M	2.1.2.3	Yes__No__
MR 4	CONNECTION AVAILABLE?		M	2.1.2.4	Yes__No__
Comments:					

## B.6.2 Messages Transmitted

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
MT 1	MODIFY REQUEST?		M	2.1.2.1	Yes__ No__
MT 2	MODIFY ACKNOWLEDGE?		M	2.1.2.2	Yes__ No__
MT 3	MODIFY REJECT?		M	2.1.2.3	Yes__ No__
MT 4	CONNECTION AVAILABLE?		M	2.1.2.4	Yes__ No__
Comments:					

## B.6.3 Transit entity Information Elements

The tables in this subsection ask questions related to the support of IEs in messages received and transmitted by the IUT.

### B.6.3.1 *Transit entity Information Elements Received*

#### B.6.3.1.1 Modify Request Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 1.1	Protocol discriminator?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.2	Call reference?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.3	Message type?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.4	Message length?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.5	ATM traffic descriptor?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.6	Notification indicator?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.7	Alternative ATM traffic descriptor?	MC2	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.8	Minimum acceptable ATM traffic descriptor?	MC3	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.9	Security services?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.10	Generic identifier transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.11	Generic application transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

#### B.6.3.1.2 Modify Acknowledge Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 2.1	Protocol discriminator?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.2	Call reference?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.3	Message type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.4	Message length?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.5	ATM traffic descriptor?	MC2 OR MC3	M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.6	Notification indicator?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.7	Broadband report type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.8	Security services?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.9	Generic identifier transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.10	Generic application transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**B.6.3.1.3 Modify Reject Information Elements Received**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 3.1	Protocol discriminator?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.2	Call reference?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.3	Message type?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.4	Message length?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.5	Notification indicator?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.6	Cause?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.7	Security services?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.8	Generic identifier transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.9	Generic application transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**B.6.3.1.4 Connection Available Information Elements Received**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 4.1	Protocol discriminator?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.2	Call reference?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.3	Message type?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.4	Message length?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.5	Notification indicator?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.6	Security services?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.7	Generic identifier transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.8	Generic application transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**B.6.3.2 Transit Entity Information Elements Transmitted**

Indicating support for an item in the tables in this subsection states that the implementation has the ability to generate, and to transmit in the specified message, the information elements listed. Such support does not necessarily mean that the indicated information element is included in every instance of the transmitted message.

**B.6.3.2.1 Modify Request Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 1.1	Protocol discriminator?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.2	Call reference?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.3	Message type?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.4	Message length?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.5	ATM traffic descriptor?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.6	Notification indicator?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.7	Alternative ATM traffic descriptor?	MC2	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.8	Minimum acceptable ATM traffic descriptor?	MC3	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.9	Security services?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.10	Generic identifier transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.11	Generic application transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**B.6.3.2.2 Modify Acknowledge Information Elements Transmitted**

tem	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 2.1	Protocol discriminator?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.2	Call reference?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.3	Message type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.4	Message length?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.5	ATM traffic descriptor?	MC2 OR MC3	M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.6	Notification indicator?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.7	Broadband report type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.8	Security services?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.9	Generic identifier transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.10	Generic application transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**B.6.3.2.3 Modify Reject Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 3.1	Protocol discriminator?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.2	Call reference?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.3	Message type?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.4	Message length?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.5	Notification indicator?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.6	Cause?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.7	Security services?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.8	Generic identifier transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.9	Generic application transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments					

**B.6.3.2.4 Connection Available Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 4.1	Protocol discriminator?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.2	Call reference?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.3	Message type?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.4	Message length?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.5	Notification indicator?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.6	Security services?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.7	Generic identifier transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.8	Generic application transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

## B.7 Timers

Indicating support for an item in table below states that the implementation has a timer that operates in accordance with the description in section 13.1/Q.2963.1 as a transit entity.

Item	Timer: Does the implementation support ...	Conditions for status	Status	Reference	Support
TM 1	T360?	R2.1	M	13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
TM 2	T334?	R2.2 AND R3.1	O	3.3 and 13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A
Comments:					

## B.8 PNNI Procedural PICS for modification

Item	Does the IUT ...	Condition for status	Status	Reference	Support
PROC 1	Follow the procedures of 9.1.1/Q.2963.1 as modified by 9/Q.2963.2 to request the modification of a call without negotiation?		M	9.1.1/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 2	Follow the procedures of 9.1.1/Q.2963.3 to request the modification of a call with negotiation?	MC2 or MC3	M	9.1.1/Q.2963.3	Yes__No__
PROC 3	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the modify requested state follow the procedures of 9.1.2/Q.2963.1?		M	9.1.2/Q.2963.1	Yes__No__
PROC 4	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM traffic descriptor information element while in the modify requested state follow the procedures of 9.1.2/Q.2963.3?	MC2 or MC3	M	9.1.2/Q.2963.3	Yes__No__
PROC 5	On receipt of a MODIFY REJECT message while in the modify requested state follow the procedures of 9.1.3/Q.2963.1?		M	9.1.3/Q.2963.1	Yes__No__
PROC 6	On receipt of a STATUS message, which indicates the active state and cause No. 97 or cause No. 101, while in the modify requested state follow the procedures of 9.1.4/Q.2963.1?		M	9.1.4/Q.2963.1	Yes__No__
PROC 7	On expiry of Timer T360 clear the call with cause No. 102?		M	9.1.5/Q.2963.1	Yes__No__
PROC 8	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.1/Q.2963.1 as modified by 9/Q.2963.2?		M	9.2.1/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 9	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM	MC2 or MC3	M	9.2.1/Q.2963.3	Yes__No__



	traffic descriptor information element while in the active state follow the procedures of 9.2.1/Q.2963.3?				
PROC 1	On receipt of an indication that the modification without negotiation has been accepted while in the modify requested state follow the procedures of 9.2.2/Q.2963.1 as modified by 9/Q.2963.2?		M	9.2.2/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 1	On receipt of an indication that the modification with negotiation has been accepted while in the modify requested state follow the procedures of 9.2.2/Q.2963.3?	MC2 or MC3	M	9.2.2/Q.2963.3	Yes__No__
PROC 1	On receipt of an indication that the modification has been rejected while in the modify requested state follow the procedures of 9.2.4/Q.2963.1?		M	9.2.4/Q.2963.1	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with both the Minimum acceptable ATM traffic descriptor and the Alternative ATM traffic descriptor information, reject the modification following the procedures in 9.2.4/Q.2963.3?	MC2 or MC3	M	9.2.4/Q.2963.3	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with an Alternative ATM traffic descriptor information element which is not coded according to the allowed coding, treat the Alternative ATM traffic descriptor information element as a non-mandatory information elements with content error ?	MC2	M	9.2.4/Q.2963.3	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with Minimum Acceptable ATM traffic descriptor information element which is not coded according to the allowed coding, treat the Minimum Acceptable ATM traffic descriptor information element as a non-mandatory information elements with content error?	MC3	M	9.2.4/Q.2963.3	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with ATM traffic parameters which are not according to the allowed combinations while in the active state follow the procedures of 9.2.5/Q.2963.1?		M	9.2.5/Q.2963.1	Yes__No__
PROC 1	On receipt of a CONNECTION AVAILABLE message while in the active state follow the procedures of 9.3/Q.2963.1 as modified by 3.2.1?		M	3.2.1 and 9.3/Q.2963.1	Yes__No__
Comments:					

## Annex C Protocol Implementation Conformance Statement (PICS) for AINI Modification

### C.1 Introduction

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented. Such a statement is called a Protocol Implementation Conformance Statement (PICS). For further details on PICS see the Implementation Conformance Statement Proforma Style Guide [C.6].

#### C.1.1 Scope

This document provides the PICS proforma for the Addendum to AINI on modification of active connection, as specified in this document, in compliance with the relevant requirements, and in accordance with the relevant guidelines, given in ISO/IEC 9646-7 [C.2]. In most cases, statements contained in notes in the specification, which were intended as information, are not included in the PICS.

#### C.1.2 Normative References

- [C.1] ISO/IEC 9646-1: 1994, Information technology – Open systems interconnection – Conformance testing methodology and framework – Part 1: General Concepts (See also ITU Recommendation X.290 (1995)).
- [C.2] ISO/IEC 9646-7:1994, Information technology – Open systems interconnection – Conformance testing methodology and framework – Part 7: Implementation Conformance Statements”.
- [C.3] ITU-T Recommendation Q.2963.1 (1999), *Digital Subscriber Signalling System No. 2 – Connection modification: Peak cell rate modification by the connection owner.*
- [C.4] ITU-T Recommendation Q.2963.2 (1997), *Digital Subscriber Signalling System No. 2 – Connection modification: Modification procedures for sustainable cell rate parameters.*
- [C.5] ITU-T Recommendation Q.2963.3 (1998), *Digital Subscriber Signalling System No. 2 – Connection modification: : ATM traffic descriptor modification with negotiation by the connection owner.*
- [C.6] ATM Forum Technical Committee, "Implementation Conformance Statement Proforma Style Guide", af-test-0137-000, February 2000.

#### C.1.3 Definitions

This document uses the following terms defined in ISO/IEC 9646-1[C.1]:

- A Protocol Implementation Conformance Statement (PICS) is a statement made by the supplier of an implementation or system, stating which capabilities have been implemented for a given protocol.
- A PICS proforma is a document, in the form of a questionnaire, designed by the protocol specifier or conformance test suite specifier, which when completed for an implementation or system becomes the PICS.

#### C.1.4 Acronyms

AAL	ATM Adaptation Layer
ABR	Available Bit Rate
AINI	ATM Inter-Network Interface
ATM	Asynchronous Transfer Mode

B-ISUP	Broadband ISDN User Part
COA	CONNECTION AVAILABLE
CBR	Constant Bit Rate
ITU-T	International Telecommunication Union-Telecommunication Standardization Sector
IUT	Implementation Under Test
M	Mandatory requirements (these are to be observed in all cases)
MBS	Maximum Burst Size
MCR	Minimum Cell Rate
MOA	MODIFICATION ACKNOWLEDGE Message
MOD	MODIFICATION REQUEST Message
MOR	MODIFICATION REJECT Message
nrtVBR	non-real time VBR
N/A	Not supported, not applicable, or the conditions for status are not met.
O	Optional (may be selected to suit the implementation, provided that any requirements applicable to the options are observed)
O.n	Optional, but support is required for either at least one or only one of the options in the group labeled with the same numeral "n".
OA&M	Operations Administration & Maintenance
PCR	Peak Cell Rate
PICS	Protocol Implementation Conformance Statement
PNNI	Private Network-Network Interface
rtVBR	real time VBR
SCR	Sustainable Cell Rate
SUT	System Under Test
UBR	Unspecified Bit Rate
UNI	User Network Interface
VBR	Variable Bit Rate

### C.1.5 Conformance

The supplier of a protocol implementation which is claimed to conform to the ATM Forum AINI specification for Modification of an Active Connection is required to complete a copy of the PICS proforma provided in this document and is required to provide the information necessary to identify both the supplier and the implementation.

## C.2 Identification of the Implementation

### Date of the Statement

\_\_\_\_\_

### Implementation Under Test (IUT) Identification

IUT Name: \_\_\_\_\_

IUT Version: \_\_\_\_\_

\_\_\_\_\_

### System Under Test (SUT) Identification

SUT Name: \_\_\_\_\_

Hardware Configuration: \_\_\_\_\_

-----  
-----

**Operating System:** \_\_\_\_\_

**Product Supplier**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_  
-----

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

**Client (if different from product supplier)**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_  
-----

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

**PICS Contact Person**

**Name:** \_\_\_\_\_

**Address:** \_\_\_\_\_  
-----

**Telephone Number:** \_\_\_\_\_

**Facsimile Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**Additional Information:** \_\_\_\_\_

\_\_\_\_\_  
 \_\_\_\_\_

## Identification of the protocol

This PICS proforma applies to the following:

af-cs-0148.000, Modification of Traffic Descriptor for an Active Connection, Addendum to ATM Forum UNI v4.0 "ATM User-Network Interface (UNI) Signalling Specification Version 4.0", to ATM Forum PNNI v1.0 "Private Network-Network Interface Specification Version 1.0", to ATM Forum "PNNI v1.0 Errata and PICS", and to ATM Forum "ATM Inter-Network Interface (AINI) Signalling Specification"

## C.3 PICS Proforma

### C.3.1 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No) \_\_\_\_\_

Note: Answering "No" indicates non-conformance to the protocol specification. Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the implementation is non-conforming, on pages attached to the PICS proforma.

### C.3.2 Instructions for Completing the PICS Proforma

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided. In particular, an explicit answer shall be entered, in each of the support column entries provided, using the specified notation.

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO-IEC 9646-7 [C.2], are used for the support column:

Y or y supported by the implementation.

N or n not supported by the implementation.

N/A, n/a or - no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional status).

The following notations, defined in ISO/IEC 9646-7 [C.2], are used for the status column:

- M mandatory - the capability is required to be supported.
- O optional - the capability may be supported or not.
- N/A not applicable - in the given context, it is impossible to use the capability.
- X prohibited (excluded) - there is a requirement not to use this capability in the given context.
- O*i* qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which identifies a unique group of related optional items and the logic of their selection which is defined immediately following the table.

## C.4 Roles

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
R 1	requirements for the transit entity?		M	3.6/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 2.1	requirements for the modification requesting entity?		M	3.7/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
R 2.2	requirements for the responding entity?		M	3.8/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

## C.5 Major Capabilities

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
MC 1.1	Modification of the PCR?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 1.2	Modification of the SCR?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 1.3	Modification of the MBS?		M	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 2	Negotiation, using Alternative ATM Traffic Descriptor		O	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
MC 3	Negotiation, using Minimum Acceptable ATM Traffic Descriptor		O	1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments: Modification includes increase and decrease					

## C.6 Transit Entity

### C.6.1 Messages Received

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
MR 1	MODIFY REQUEST?		M	2.1.2.1	Yes__No__
MR 2	MODIFY ACKNOWLEDGE?		M	2.1.2.2	Yes__No__
MR 3	MODIFY REJECT?		M	2.1.2.3	Yes__No__
MR 4	CONNECTION AVAILABLE?		M	2.1.2.4	Yes__No__
Comments:					

### C.6.2 Messages Transmitted

Item	Does the IUT support ...	Condition for status	Status	Reference	Support
MT 1	MODIFY REQUEST?		M	2.1.2.1	Yes__No__
MT 2	MODIFY ACKNOWLEDGE?		M	2.1.2.2	Yes__No__
MT 3	MODIFY REJECT?		M	2.1.2.3	Yes__No__
MT 4	CONNECTION AVAILABLE?		M	2.1.2.4	Yes__No__
Comments:					

### C.6.3 Transit entity Information Elements

The tables in this subsection ask questions related to the support of IEs in messages received and transmitted by the IUT.

#### C.6.3.1 *Transit entity Information Elements Received*

##### C.6.3.1.1 Modify Request Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 1.1	Protocol discriminator?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.2	Call reference?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.3	Message type?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.4	Message length?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.5	ATM traffic descriptor?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.6	Notification indicator?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.7	Alternative ATM traffic descriptor?	MC2	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.8	Minimum acceptable ATM traffic descriptor?	MC3	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.9	Security services?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.10	Generic identifier transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 1.11	Generic application transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

##### C.6.3.1.2 Modify Acknowledge Information Elements Received

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 2.1	Protocol discriminator?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.2	Call reference?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.3	Message type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.4	Message length?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.5	ATM traffic descriptor?	MC2 OR MC3	M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.6	Notification indicator?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.7	Broadband report type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.8	Security services?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.9	Generic identifier transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 2.10	Generic application transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.6.3.1.3 Modify Reject Information Elements Received**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 3.1	Protocol discriminator?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.2	Call reference?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.3	Message type?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.4	Message length?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.5	Notification indicator?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.6	Cause?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.7	Security services?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.8	Generic identifier transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 3.9	Generic application transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.6.3.1.4 Connection Available Information Elements Received**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IER 4.1	Protocol discriminator?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.2	Call reference?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.3	Message type?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.4	Message length?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.5	Notification indicator?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.6	Security services?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.7	Generic identifier transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IER 4.8	Generic application transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.6.3.2 Transit Entity Information Elements Transmitted**

Indicating support for an item in the tables in this subsection states that the implementation has the ability to generate, and to transmit in the specified message, the information elements listed. Such support does not necessarily mean that the indicated information element is included in every instance of the transmitted message.



**C.6.3.2.1 Modify Request Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 1.1	Protocol discriminator?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.2	Call reference?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.3	Message type?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.4	Message length?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.5	ATM traffic descriptor?		M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.6	Notification indicator?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.7	Alternative ATM traffic descriptor?	MC2	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.8	Minimum acceptable ATM traffic descriptor?	MC3	M	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.9	Security services?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.10	Generic identifier transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 1.11	Generic application transport?		O	2.1.2.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.6.3.2.2 Modify Acknowledge Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 2.1	Protocol discriminator?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.2	Call reference?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.3	Message type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.4	Message length?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.5	ATM traffic descriptor?	MC2 OR MC3	M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.6	Notification indicator?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.7	Broadband report type?		M	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.8	Security services?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.9	Generic identifier transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 2.10	Generic application transport?		O	2.1.2.2	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.6.3.2.3 Modify Reject Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 3.1	Protocol discriminator?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.2	Call reference?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.3	Message type?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.4	Message length?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.5	Notification indicator?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.6	Cause?		M	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.7	Security services?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.8	Generic identifier transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 3.9	Generic application transport?		O	2.1.2.3	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.6.3.2.4 Connection Available Information Elements Transmitted**

Item	Does the IUT support ...	Conditions for status	Status	Reference	Support
IET 4.1	Protocol discriminator?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.2	Call reference?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.3	Message type?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.4	Message length?		M	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.5	Notification indicator?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.6	Security services?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.7	Generic identifier transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
IET 4.8	Generic application transport?		O	2.1.2.4	<input type="checkbox"/> Yes <input type="checkbox"/> No
Comments:					

**C.7 Timers**

Indicating support for an item in table below states that the implementation has a timer that operates in accordance with the description in section 13.1/Q.2963.1 as a transit entity.

Item	Timer: Does the implementation support ...	Conditions for status	Status	Reference	Support
TM 1	T360?	R2.1	M	13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No
TM 2	T334?	R2.2 AND R3.1	O	3.3 and 13/Q.2963.1	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A
Comments:					

**C.8 AINI Procedural PICS for modification**

Item	Does the IUT ...	Condition for status	Status	Reference	Support
PROC 1	Follow the procedures of 9.1.1/Q.2963.1 as modified by 9/Q.2963.2 to request the modification of a call without negotiation?		M	9.1.1/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 2	Follow the procedures of 9.1.1/Q.2963.3 to request the modification of a call with negotiation?	MC2 or MC3	M	9.1.1/Q.2963.3	Yes__No__
PROC 3	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the modify requested state follow the procedures of 9.1.2/Q.2963.1?		M	9.1.2/Q.2963.1	Yes__No__
PROC 4	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM traffic descriptor information element while in the modify requested state follow the procedures of 9.1.2/Q.2963.3?	MC2 or MC3	M	9.1.2/Q.2963.3	Yes__No__
PROC 5	On receipt of a MODIFY REJECT message while in the modify requested state follow the procedures of 9.1.3/Q.2963.1?		M	9.1.3/Q.2963.1	Yes__No__

PROC 6	On receipt of a STATUS message, which indicates the active state and cause No. 97 or cause No. 101, while in the modify requested state follow the procedures of 9.1.4/Q.2963.1?		M	9.1.4/Q.2963.1	Yes__No__
PROC 7	On expiry of Timer T360 clear the call with cause No. 102?		M	9.1.5/Q.2963.1	Yes__No__
PROC 8	On receipt of a MODIFY REQUEST message with neither an Alternative ATM traffic descriptor nor a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.1/Q.2963.1 as modified by 9/Q.2963.2?		M	9.2.1/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 9	On receipt of a MODIFY REQUEST message with either an Alternative ATM traffic descriptor or a Minimum Acceptable ATM traffic descriptor information element while in the active state follow the procedures of 9.2.1/Q.2963.3?	MC2 or MC3	M	9.2.1/Q.2963.3	Yes__No__
PROC 1	On receipt of an indication that the modification without negotiation has been accepted while in the modify requested state follow the procedures of 9.2.2/Q.2963.1 as modified by 9/Q.2963.2?		M	9.2.2/Q.2963.1 and 9/Q.2963.2	Yes__No__
PROC 1	On receipt of an indication that the modification with negotiation has been accepted while in the modify requested state follow the procedures of 9.2.2/Q.2963.3?	MC2 or MC3	M	9.2.2/Q.2963.3	Yes__No__
PROC 1	On receipt of an indication that the modification has been rejected while in the modify requested state follow the procedures of 9.2.4/Q.2963.1?		M	9.2.4/Q.2963.1	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with both the Minimum acceptable ATM traffic descriptor and the Alternative ATM traffic descriptor information, reject the modification following the procedures in 9.2.4/Q.2963.3?	MC2 or MC3	M	9.2.4/Q.2963.3	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with an Alternative ATM traffic descriptor information element which is not coded according to the allowed coding, treat the Alternative ATM traffic descriptor information element as a non-mandatory information elements with content error ?	MC2	M	9.2.4/Q.2963.3	Yes__No__
PROC 1	On receipt of a MODIFY REQUEST message with Minimum Acceptable ATM traffic descriptor information element which is not coded according to the allowed coding, treat the Minimum Acceptable ATM traffic descriptor information element as a non-mandatory information elements with	MC3	M	9.2.4/Q.2963.3	Yes__No__

	content error?				
PROC 1	On receipt of a MODIFY REQUEST message with ATM traffic parameters which are not according to the allowed combinations while in the active state follow the procedures of 9.2.5/Q.2963.1?		M	9.2.5/Q.2963.1	Yes__No__
PROC 1	On receipt of a CONNECTION AVAILABLE message while in the active state follow the procedures of 9.3/Q.2963.1 as modified by 3.3?		M	3.3 and 9.3/Q.2963.1	Yes__No__
Comments:					